

# The Modular Solution for your Precision Cleaning Task

UCMSmartLine



**UCM**  
*technology that inspires*



+ Modular multi-stage wash and rinse process

+ Use of mono-, twin- or multi-frequency ultrasonics

+ Flexible transport system for optimized throughput and gentle part handling

+ Space-saving design with electrical and control technology integrated into each module

+ High-quality machine enclosure protects parts and personnel from contamination and emissions

+ Highly adaptable to changing market conditions thanks to ability to add modules at a later date

+ Short delivery times



Thin film coated parts



Precision optics



Medical components



Precision mechanics

## Fields of application

- Thin film coated parts (PVD/CVD) e.g. tools, automotive parts, fittings
- Precision optics e.g. micro-optics, lenses, mirrors, prisms, masks
- Medical components e.g. implants, surgical tools, medical instruments
- Precision mechanics/precision parts e.g. aircraft, automotive parts, watches, jewellery

# The Modular Solution for your Precision Cleaning Task



The UCMSmartLine is a modular, immersion-type ultrasonic system with up to nine wash and rinse stages. The versatile and well thought-out system concept offers numerous possibilities for solving individual cleaning tasks with the highest demands on component quality:



Process validation  
through cleaning tests  
in our test centres.

## Machine concept

- Parts are agitated in wash and rinse modules, optional rotary and spinning movements
- Variable ultrasonic equipment for mono, twin and multi-frequency operation from 25 to 120 kHz
- Hot air, infrared and vacuum drying, several drying stages possible with infrared option
- Overflow circuit filtration
- Flexible transport system for handling of product carriers and baskets
- Easy creation of up to 99 different programs
- Process visualisation and fault diagnosis via IPC controller
- Connected to rinse water/ DI water re-circulation system
- Supply air filtered by HEPA filter
- Interfacing with clean rooms possible
- Closed system

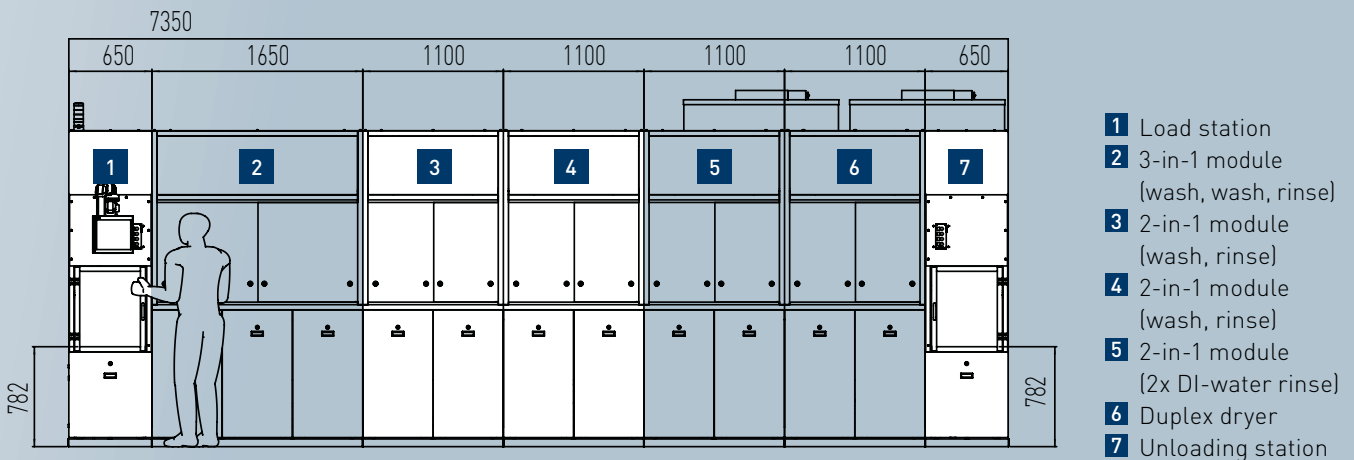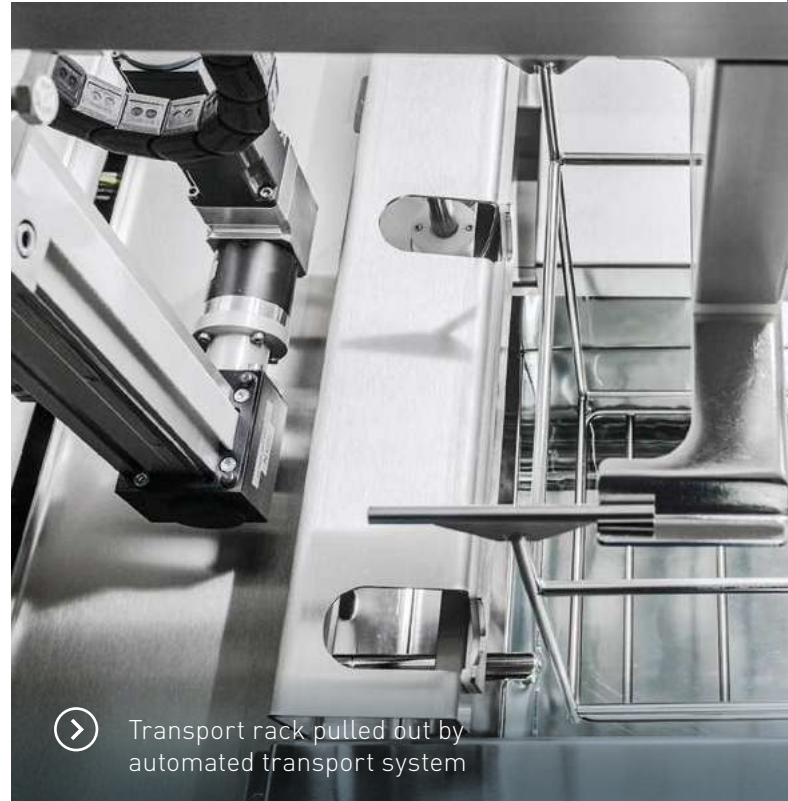

- Example layout of a UCMSmartLine with 9 wet and 2 drying positions, manual loading/unloading on operator side.



## Technical data

MACHINE DATA	2-in-1 module	3-in-1 module	Manual loading/ unloading station**
<b>Dimensions (LxW)</b>	1,100 x 1,500 mm	1,650 x 1,500 mm	650 x 1,500 mm
<b>Height without HEPA filter</b>	2,490 mm	2,490 mm	2,490 mm
<b>Height incl. HEPA filter</b>	2,790 mm	2,790 mm	2,790 mm
<b>Weight</b>	approx. 500 kg*	approx. 700 kg*	max. approx. 300 kg

## WASH TANK/RINSE TANK

<b>Dimensions (LxWxH)</b>	370 x 420 x 390 mm
<b>Tank capacity</b>	60 l + 10 l

## ULTRASONIC SYSTEM OPTIONS

<b>Mono</b>	25, 40, 80 kHz
<b>Twin</b>	25/50 & 40/80 kHz
<b>Multi</b>	40/80/120 kHz

## PARTS CARRIER/BASKET

<b>Dimensions (LxWxH)</b>	250 x 300 x 210 mm
<b>Part weight</b>	up to 20 kg, incl. static transport rack

## CONNECTIONS


<b>Connected load</b>	from 8.2 kW to 72.8 kW
-----------------------	------------------------

\* Weight and length vary depending on system configuration

\*\* Weight and length vary depending on loading and unloading configuration (manual or automated)



# Our Locations Worldwide



© SBS Ecoclean Group • 05/2020 • EN • Subject to change. The information in this brochure contains only general descriptions or performance characteristics; these may vary depending on the application. The desired performance characteristics are only binding if they are expressly agreed upon at the time the contract is concluded.

**SBS ECOCLEAN GROUP**

[www.ucm-ag.com](http://www.ucm-ag.com)

**ECOCLEAN UCM MHITRAA**